



Northstar AXIS Tenders have been developed to answer all the critical needs for a functional, ergonomic and performing yacht tender. AXIS Tenders are offered in 6 different lengths between 3.2m (10'7") and 5.3 (17'5") to fit a variety of swimming platforms and garages. Benefiting from the Delta-lift hull shape with integrated delta tabs aft, all AXIS tenders plane very easily and ride dry.

Fitted with standard features like hydraulic steering, CSM (Hypalon) tubes, built-in fuel tank, pop-up cleats, extensive electrical system with auto bilge pump, navigation lights and USB charging socket, an AXIS tender is ready to become your indispensable tool around your yacht.

**NORTHSTAR**

[www.northstar.boats](http://www.northstar.boats)

ISO 9001  
ISO 14001  
ISO 10002  
ISO 18001



Non contractual document. All information presented subject to change without notice.


optional equipment



Pop up ski tow pylon  
(4.2 / 4.8 / 5.3)




LED floor lighting



EVA Faux teak deck



Console railing  
(4.2 / 4.8 / 5.3)

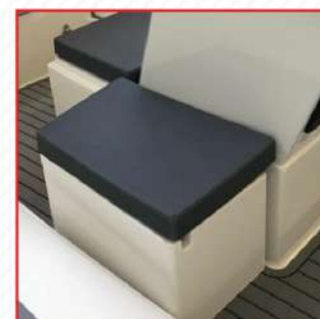

Additional seat  
(4.2 / 4.8 / 5.3)






Bimini Top  
(4.2 / 4.8 / 5.3)

color options

**TUBE COLORS**

-  WHITE
-  LIGHT GREY
-  DARK GREY
-  BLACK
-  CARBON BLACK

**HULL / DECK COLORS**

-  WHITE
-  GREY
-  BLACK (HULL only)

**UPHOLSTERY COLORS**


-  CHAMPAGNE
-  RED
-  MANDARIN
-  SHARK GREY



**NORTHSTAR**  
**AXIS**  
**TENDERS**



**NORTHSTAR**  
**AXIS**  
TENDERS

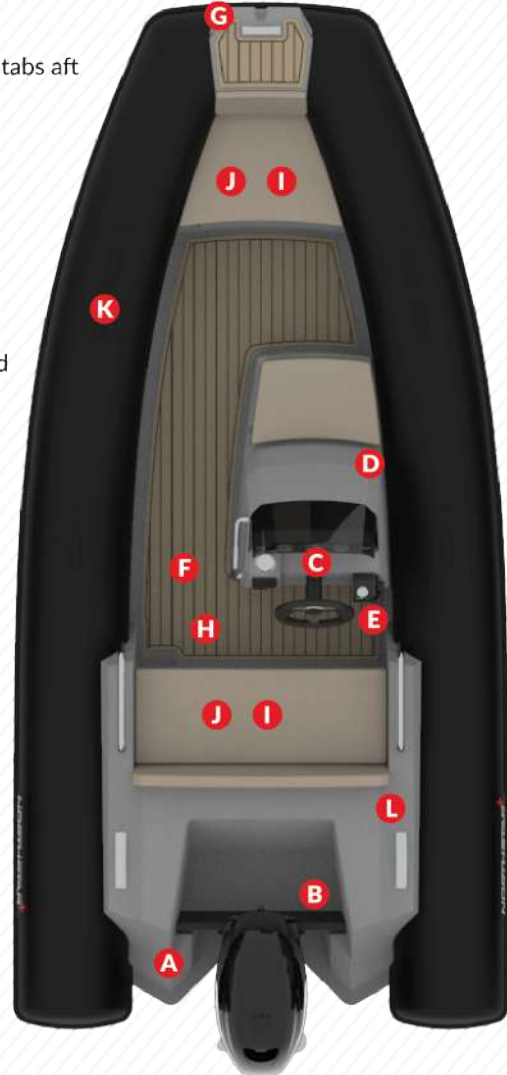

minimalist design with maximalist features

- A** Delta-lift® hull; offering easy planing with integrated Delta tabs aft
- B** Replaceable transoms
- C** Standard hydraulic steering
- D** Ergonomic consoles
- E** Sturdy acrylic glove box for loose items
  - USB charging port and main cut off switch inside
- F** Standard fuel system with integral fuel tank, fuel gauge and water separator
- G** Standard electrical system with the following:
  - Switch panel
  - LED navigation lights
  - All-round light (socket type)
  - Automatic bilge pump
- H** Self-bailing deck (3.1 and 3.4 while underway)
- I** Large storage areas
- J** Marine upholstery
- K** Sturdy CSM (Hypalon) tubes
- L** Standard
  - Swimming ladder
  - Pop up cleats (3 pcs)
  - Lifting rings (4 pcs)
  - Towing rings (3 pcs U-bolt)

**AXIS 3.1**

Length	3.25 m / 10'7"
Beam	1.81 m / 5'11"
Weight	210 kg / 462 lbs
Fuel Capacity	33 lt / 8.7 US gal
Tube Diameter	0.40 m / 15.7"
Tube Pressure	0.18 bar / 2.6 psi
Air Chambers	3
Max Payload	4 pax
Min HP	20 HP
Recommended HP	25 HP
Max HP	30 HP
Shaft Length	S / L
Design Category	CE - Cat C

**AXIS 3.4**

Length	3.40 m / 11'2"
Beam	1.75 m / 5'9"
Weight	210 kg / 462 lbs
Fuel Capacity	33 lt / 8.7 US gal
Tube Diameter	0.41 m / 16.1"
Tube Pressure	0.18 bar / 2.6 psi
Air Chambers	3
Max Payload	4 pax
Min HP	25 HP
Recommended HP	30 HP
Max HP	40 HP
Shaft Length	L
Design Category	CE - Cat C

**AXIS 3.8**

Length	3.85 m / 12'6"
Beam	1.91 m / 6'3"
Weight	245 kg / 540 lbs
Fuel Capacity	42 lt / 11.09 US gal
Tube Diameter	0.43 m / 16.9"
Tube Pressure	0.18 bar / 2.6 psi
Air Chambers	3
Max Payload	5 pax
Min HP	40 HP
Recommended HP	50 HP
Max HP	60 HP
Shaft Length	L
Design Category	CE - Cat C

**AXIS 4.2**

Length	4.25 m / 13'9"
Beam	1.96 m / 6'5"
Weight	282 kg / 621 lbs
Fuel Capacity	42 lt / 11.09 US gal
Tube Diameter	0.43 m / 16.9"
Tube Pressure	0.18 bar / 2.6 psi
Air Chambers	4
Max Payload	6 pax
Min HP	40 HP
Recommended HP	50 HP
Max HP	60 HP
Shaft Length	L
Design Category	CE - Cat C

**AXIS 4.8**

Length	4.85 m / 15'9"
Beam	2.23 m / 7'3"
Weight	420 kg / 925 lbs
Fuel Capacity	51 lt / 13.47 US gal
Tube Diameter	0.46 m / 18.1"
Tube Pressure	0.18 bar / 2.6 psi
Air Chambers	4
Max Payload	8 pax
Min HP	50 HP
Recommended HP	70 HP
Max HP	80 HP
Shaft Length	L
Design Category	CE - Cat C

**AXIS 5.3**

Length	5.35 m / 17'5"
Beam	2.33 m / 7'8"
Weight	495 kg / 1091 lbs
Fuel Capacity	62 lt / 16.47 US gal
Tube Diameter	0.48 m / 18.9"
Tube Pressure	0.18 bar / 2.6 psi
Air Chambers	4
Max Payload	9 pax
Min HP	70 HP
Recommended HP	90 HP
Max HP	115 HP
Shaft Length	L
Design Category	CE - Cat C

all with the traditional Northstar quality